



DATASHEET

Issue 1.0



Multifunction Meters

Transducers & Isolators

Temperature Controllers

Converters & Recorders

Digital Panel Meters

Current Transformers

Analogue Panel Meters

Shunts

Digital Multimeters

Clamp Meters

Insulation Testers

ND30PNET

**METER OF POWER NETWORK
PARAMETERS WITH PROFINET**


Features

- Measurement of 54 power network parameters, including current and voltage harmonics up to 51st, in 1-phase 2-wire or 3-phase 3 or 4-wire balanced and unbalanced systems.
- Graphical color display: LCD TFT 3,5", 320 x 240 pixels, fully configurable by a user (10 views, 8 parameters in each).
- Indications include the values of programmed ratios.
- Memory of minimum and maximum values.
- 2 configurable alarm outputs.
- Optional: analog output 0/4...20 mA and 2 PT 100 inputs (e.g. for measurement of transformer temperature).
- Digital output RS-485 - MODBUS protocol.
- Modern and user-friendly ethernet/profinet (version 2.2.) interface.
- Programming of parameters using free econ software.
- Battery backup RTC.
- Overall dimensions: 96 x 96 x 77 mm.

SUBJECT TO CHANGE WITHOUT NOTICE

This manual superseded all previous versions – please keep for future reference

Example of Application

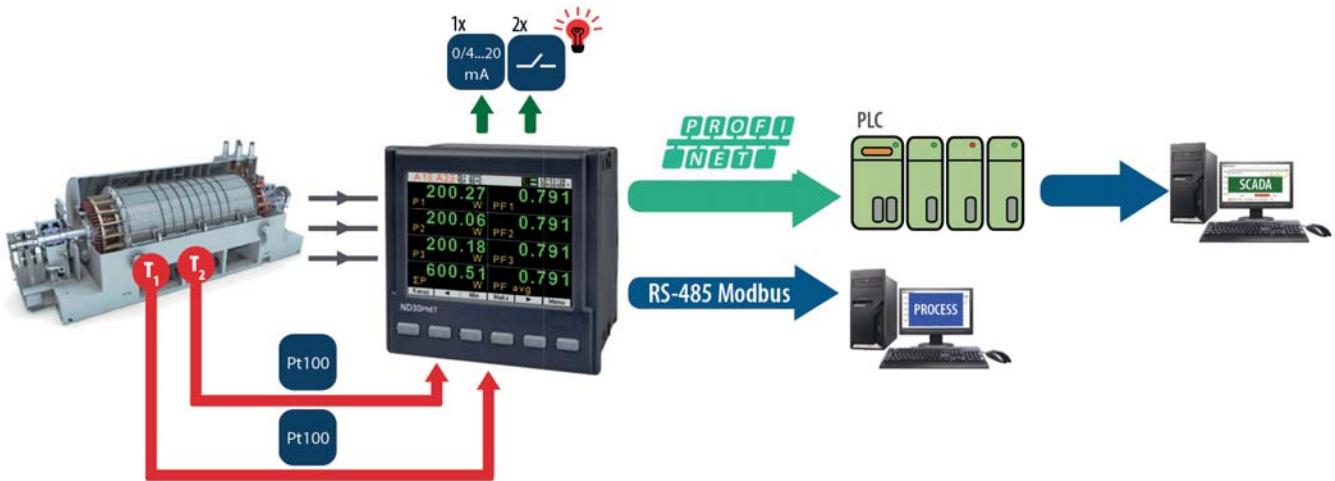

Measurement and Visualization of Power Network Parameters

- Phase voltages: U₁, U₂, U₃
- Phase-to-phase voltages: U₁₂, U₂₃, U₃₁
- Phase currents I₁, I₂, I₃
- Active phase powers: P₁, P₂, P₃
- Reactive phase powers: Q₁, Q₂, Q₃
- Apparent phase powers: S₁, S₂, S₃
- Active power factors: PF₁, PF₂, PF₃
- Reactive/active power factors: tgφ₁, tgφ₂, tgφ₃
- Active, reactive and apparent 3-phase power: P, Q, S
- Mean 3-phase power factors: PF, tgφ
- Frequency f
- Mean 3-phase voltage: U_s
- Mean phase-to-phase voltage: U_{mf}
- Mean 3-phase current: I_s
- 15, 30, 60 minutes' mean active power: P_{demand}
- Mean apparent power S_{demand}
- Average current i_{demand}
- Active, reactive and apparent 3-phase energy: EnP, EnQ, EnS
- Active, reactive and apparent energy from external counter: EnPE
- Total harmonic content coefficients for phase voltages and currents THD_{U1}, THD_{U2}, THD_{U3}, THD_{I1}, THD_{I2}, THD_{I3} and for 3-phase voltages and currents THD_U, THD_I
- Harmonics for current and phase voltage up to 51 st!
- Temperature (2 x Pt100 input)

Features	Inputs	Outputs	Galvanic Isolation

Technical Data - Measuring Range

Measured value	Measuring range	L1	L2	L3	Σ	Class (*) / Basic error (*) class relative to the measured value acc. to EN61557-12
Current 1/5 A 1 A~ 5 A~	0.010 .. 0.100 .. 1.200 A (tr_I=1) 0.050 .. 0.500 .. 6.000 A (tr_I=1) .. 20.00 kA (tr_I≠1)	•	•	•		Class 0.2
Voltage L-N 57.7 V~ 230 V~ 400 V~	5.7..11.5 .. 70.0 V (tr_U=1) 23.0..46 .. 276.0 V (tr_U=1) 40.0..80 .. 480.0 V (tr_U=1) ..480.0 kV (tr_U≠1)	•	•	•		Class 0.2
Voltage L-L 100 V~ 100 V~ 400 V~ 690 V~	10.0..20..120.0 V (tr_U=1) 40.0..80 .. 480.0 V (tr_U=1) 69.0..138 .. 830.0 V (tr_U=1) ..830.0 kV (tr_U≠1)	•	•	•		Class 0.5
Active power P _i , average active power P _{dt}	.. (-)1999.9 W .. (-)1999.9 MW (tr_U≠1.tr_I=1)	•	•	•	•	Class 0.5
Reactive power Q _i	.. (-)1999.9 Var .. (-)1999.9 MVar (tr_U≠1.tr_I=1)	•	•	•	•	Class 1
Apparent power S _i , average apparent power S _{dt}	..1999.9 VA ..1999.9 MVA (tr_U≠1.tr_I=1)	•	•	•	•	Class 0.5
Active energy EnP (imported or exported)	.. (-)1999.9 Wh .. (-)1999.9 MWh (tr_U≠1.tr_I=1)				•	Class 0.5
Reactive energy EnQ (inductive or capacitive)	.. (-)1999.9 Varh .. (-)1999.9 MVarh (tr_U≠1.tr_I=1)				•	Class 1
Apparent energy EnS	.. 1999.9 VAh ..1999.9 MVAh (tr_U≠1.tr_I=1)				•	Class 0.5
Active power factor PF _i	-1.00 .. 0 .. 1.00	•	•	•	•	± 0.01 of basic error
Coefficient tgφ _i (ratio of reactive power to active power)	-1.20 .. 0 .. 1.20	•	•	•	•	± 0.01 of basic error
Frequency f	45.00..65.00 Hz				•	Class 0.1
Total harmonic distortion of voltage THDU and current THDI	0.0 .. 100.0 %	•	•	•	•	Class 5 50 / 60 Hz
Amplitudes of the voltage U _{h1} ... U _{h50} , and current I _{h1} ... I _{h50}	0.0 .. 100.0 %	•	•	•		Class 5 50 / 60 Hz

tr_I, tr_U – ratio of current and voltage transformer

Inputs

Input type	Properties
Input Pt100 (T1, T2) - option	2 x Pt100, 2-wire, -50...400°C, basic error 0.5 %

Digital Interface

Interface type	Transmission protocol	Baud rate
RS-485	Modbus RTU 8N2,8E1,8O1,8N1	Address 1..247 baud rate: 4.8, 9.6, 19.2, 38.4, 57.6, 115.2 kbit/s
Ethernet /Profinet	ICMP (Ping) / Profinet version 2.2	

External Features

Readout field	graphic colour display LCD TFT 3.5", 320x240 pixels	
Overall dimensions	96 x 96 x 77 mm	mounting hole 92.5 x 92.5 mm
Weight	0.3 kg	
Protection grade	from frontal side: IP65	from terminal side: IP20



Rated Operating Conditions

Supply voltage	→ 85...253 V a.c. (40...50...400 Hz), 90...300 V d.c. or 20...40 V a.c., 20...60 V d.c.	power consumption ≤ 6 VA
Power consumption	in voltage circuit ≤ 0.2 VA	in current circuit ≤ 0.1 VA
Input signal	0...0.1...1.2 In; 0.1...0.2...1.2 Un for current, voltage, PFi, tgj	frequency 45...50...60...65 Hz, sinusoidal (THD ≤ 8%)
Power factor	-1...0...1	
Preheating time	5 min.	
Ambient temperature	-10...23...55°C, class K55 acc. to EN61557-12	
Humidity	0...40...65...95%	without condensation
Operating position	any	
External magnetic field	≤ 40...400 A/m d.c.	≤ 3 A/m a.c. 50/60 Hz
Short-term overload	voltage input: 2 Un (5 sec.)	current input 50 A (1 sec.)
Admissible crest factor	current: 2	voltage: 2
Additional error (in % of the intrinsic error)		from ambient temperature change: < 50% / 10°C

Safety and Compatibility Requirements

Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Isolation insured by the casing	double	acc. to EN 61010-1
Isolation between circuits	basic	acc. to EN 61010-1
Pollution level	2	acc. to EN 61010-1
Installation category	III	acc. to EN 61010-1
Maximal phase-to-earth voltage	• for supply circuit and relay outputs 300 V • for measuring input 500 V • for circuits of RS-485, Ethernet, pulse input and output, analogue outputs: 50 V	acc. to EN 61010-1
Altitude a.s.l.	< 2000 m	

Connection Diagrams

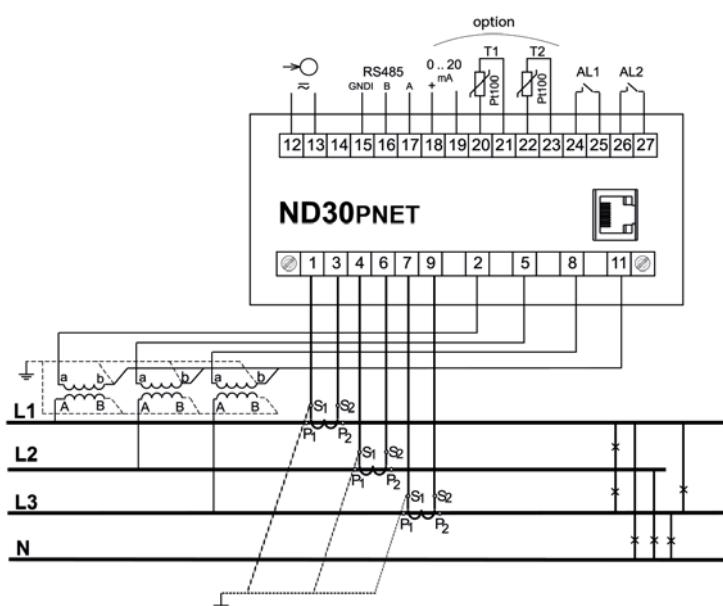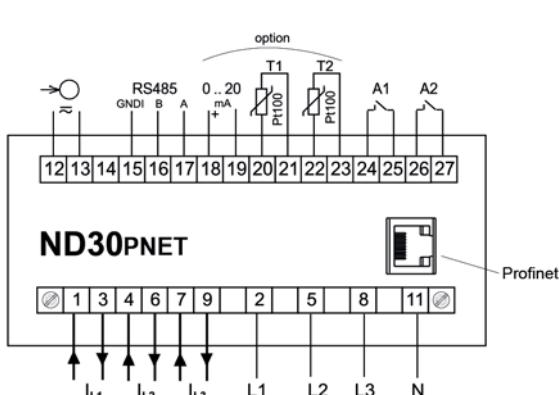


Displaying of Measurement Parameters

A1	A2	T1: 52°C T2: 31°C	15/03/16 11:33:16
U1	V	I1	A
225.48		1.005	
U2	V	I2	A
228.91		2.105	
U3	V	I3	A
231.22		1.805	
f	Hz	avg	A
49.999		1.638	
Del	◀	Min	Max
	▶		Menu

A1	A2	T1: 131°C T2: 329°C	15/03/16 13:04:26
ΣP	W	21 660 807.201	En P+ kWh
ΣQ	var	2 786 343.635	En P- kWh
ΣS	kVA	1.126	13 760.862 En Q kvarh
24 853 934.200	En S kVAh	12 035.698	En Q# kvarh
Del	◀	Min	Max
	▶		Menu

A1	A2	T1: 52°C T2: 57°C	15/03/16 12:02:57
U1	V	S1	VA
225.48		226.57	
I1	A	PF1	
1.005		0.913	
P1	W	tg1	
206.88		0.447	
Q1	var	f	Hz
92.387		49.999	
Q1	var	f	Hz
Del	◀	Min	Max
	▶		Menu

A1	A2	T1: 49°C T2: 53°C	22/09/15 13:36:31
U1	%	I1	%
0.905		0.905	
U2	%	I2	%
0.905		0.903	
U3	%	I3	%
0.903		0.903	
Har.	5		
50160	◀	▼	▲
	▶		Menu

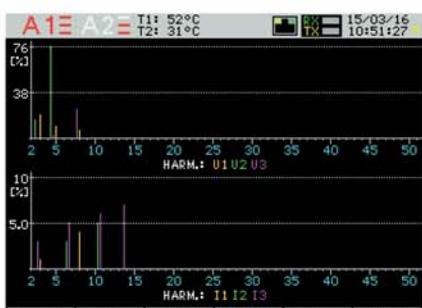

Up to 10 programmable screens
(8 parameters per page);
ability to change colour for all screens.

Available colours for digital indications:




Two screens dedicated to harmonics;
indication of individual harmonic
for voltages and currents (up to 51st);
bargraph presentation for all harmonics
with zoom function.

Easy to use and intuitive menu;
information bar with status of: phase
sequence, alarm outputs, temperature
measurements*, archiving and memory*,
Ethernet* and RS-485 interfaces,
time and date.

*Availability of feature depends on
hardware version of ND30PNET.

Meter Configuration with Free eCon Software

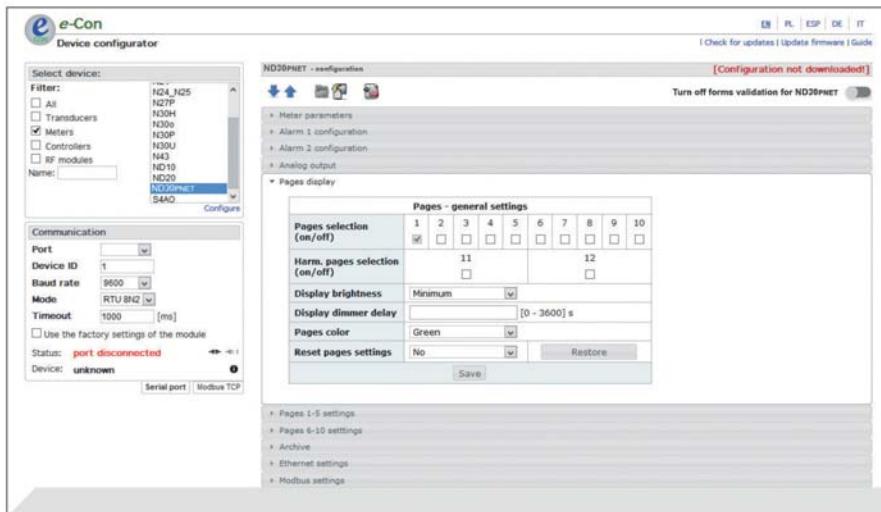

Ability to configure and update ND30PNET with free eCon software (via RS-485)

*Availability of feature depends on hardware version of ND30PNET

Ordering Code

Ordering	Meter ND30PNET -	X	X	X	XX	X	X
Input voltage (phase/phase-to-phase) un:							
3 x 57.7/ 100 V, 3x 230/ 400 V		1					
3 x 110/ 190 V, 3 x 400/ 690 V		2					
Additional outputs /inputs:							
2 relays		1					
2 relays, 1 analogue output, 2 inputs PT100		2					
Supply:							
85...253 V a.c., 90...300 V d.c.			1				
20...40 V a.c., 20...60 V d.c.			2				
Version:							
standard				00			
custom-made*				XX			
Language:					P		
Polish					E		
English					X		
other*							
Acceptance tests:					O		
without extra quality requirements					0		
with an extra quality inspection certificate					1		
acc. to customer's request					X		

EXAMPLE OF ORDER:

The code **ND30PNET - 1 2 2 1 00 E 0** means:

ND30PNET - meter ND30PNET

1 - input voltage 3 x 57.7/ 100 V, 3x 230/ 400 V

2 - 2 relays, 1 analog output, 2 inputs PT100

1 - supply: 85...253 V a.c., 90...300 V d.c.


00 - standard version

E - user's manual in English

0 - without additional quality requirements.

* - after agreeing with the manufacturer

See Also

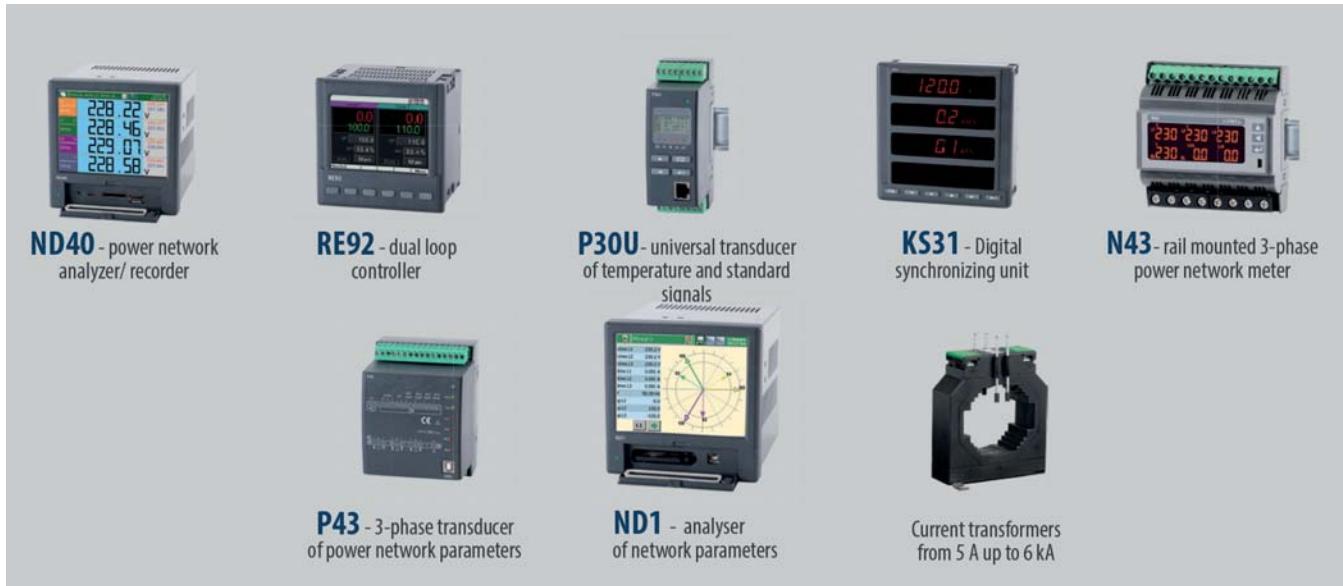

Contact



Sifam w Instrumentation Ltd

1 Warner Drive
Springwood Industrial Estate
Braintree, Essex
CM7 2YW

Tel: 01376 335271
E-mail: sales@sifamtinsley.com

www.sifamtinsley.co.uk