

RE70 TEMPERATURE CONTROLLER

FEATURES:



- Universal input for RTD and TC sensors.
- Relay output.
- Control of on/off type or PID with auto-tuning.
- Manual operating mode.

INPUTS:




OUTPUTS:



GALVANIC ISOLATION:



EXAMPLE OF APPLICATION

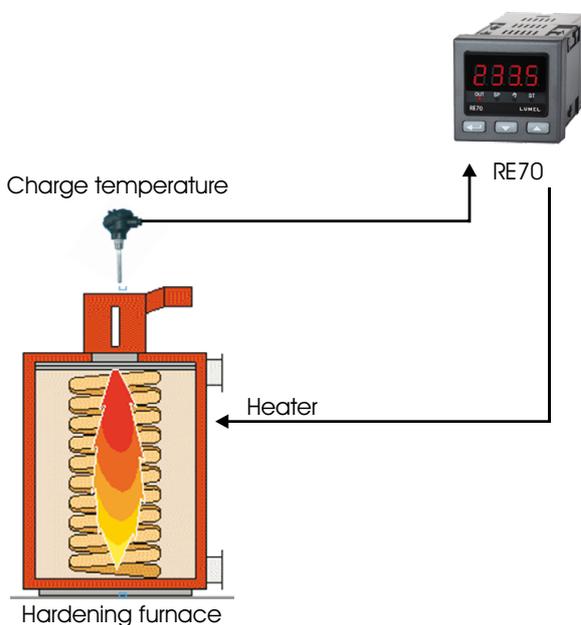

Temperature control in a hardening furnace.

INPUT

| Input type | Designation | Range | | Error |
|--------------|-------------|---------------|-----------------|-------|
| Pt100 | Pt100 | -200 .. 850°C | -328 .. 1563°F | 0.3% |
| Pt1000 | Pt1000 | -200.. 850°C | -328 .. 1563°F | 0.3% |
| Fe-CuNi | J | -50 .. 1200°C | -58 .. 2192°F | 0.3% |
| Cu-CuNi | T | -50 .. 400°C | -58 .. 752°F | 0.3% |
| NiCr-NiAl | K | -50 .. 1372°C | -58 .. 2501,6°F | 0.3% |
| PtRh10-Pt | S | 0 .. 1767°C | 32 .. 3212,6°F | 0.5% |
| PtRh13-Pt | R | 0 .. 1767°C | 32 .. 3212,6°F | 0.5% |
| PtRh30-PtRh6 | B | 0 .. 1767°C | 32 .. 3212,6°F | 0.5% |
| NiCrSi-NiSi | N | -50 .. 1300°C | -58 .. 2372°F | 0.3% |

OUTPUT

| Output type | Properties |
|--------------|--|
| Relay output | type SPDT (form C), max load: 5 A/230 V AC, max. 200,000 cycles for 5 A/230 V AC (resistive) |

RE70 TEMPERATURE CONTROLLER

EXTERNAL FEATURES

| | | |
|--------------------|-------------------------|--------------------------|
| Readout field | LED | 9,3 mm, 4 digits |
| Overall dimensions | 48 × 48 × 93 mm | |
| Weight | 0.25 kg | |
| Protection grade | from frontal side: IP65 | from terminal side: IP20 |


RATED OPERATING CONDITIONS

| | | |
|--------------------|----------------------------|------------------------|
| Supply voltage | 230 V a.c. +/- 10% | frequency: 50 .. 60 Hz |
| Temperature | ambient: 0...23...50°C | storage: -20...70°C |
| Humidity | < 85% without condensation | |
| Operating position | any | |


SAFETY AND COMPATIBILITY REQUIREMENTS

| | | |
|--|------------------------------------|--------------------------|
| Electromagnetic compatibility | noise immunity | acc. to EN 61000-6-2 |
| | noise emissions | acc. to EN 61000-6-4 |
| Pollution level | 2 | |
| Installation category | III | |
| Maximal phase-to-earth operating voltage | for supply circuit, outputs: 300 V | for input circuits: 50 V |
| Altitude above sea level | < 2000 m | |


CONNECTION DIAGRAMS




resistance thermometer Pt100 in a 2-wire system



resistance thermometer Pt100 in a 3-wire system




resistance thermometer Pt1000




thermocouple

Fig.1 Connection of input signals.



supply

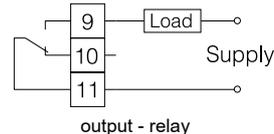

output - relay

Fig.2 Connection of supply and load circuit.




Fig.3 Interface RS-485 (for controller configuration).

ORDERING

| Ordering Code | Description |
|---------------|--|
| RE70 00M0* | Temperature controller RE72, universal input for thermocouple and resistance thermometers, 1x relay output supply 230VAC, documentation and descriptions In Polish and English, test certificate |

* Upon agreement, an option to order a calibration certificate for the product is available against payment. Then, in the execution code, in the place of the last character, enter the digit 2, eg **RE70 00M2**. The customer will then receive a standard test certificate and a calibration certificate (against payment).