



sifam tinsley
PRECISION INSTRUMENTATION

TRANSDUCERS & ISOLATORS
www.sifamtinsley.co.uk



DATASHEET

Issue 1



Multifunction Meters
Transducers & Isolators
Temperature Controllers
Converters & Recorders
Digital Panel Meters
Current Transformers
kWh Energy Meters
Analogue Panel Meters
Shunts
Digital Bargraphs
Digital Multimeters
Protection Relays
Synchroscope Series
Rotary Switches
Power Supplies
Test & Measurement

THETA PI-101 PROGRAMMABLE SINGLE OUTPUT DC ISOLATOR

SUBJECT TO CHANGE WITHOUT NOTICE

This datasheet superseded all previous versions – please keep for future reference

Product Features:

- All input signal range and output signal range are user programmable
- Electric isolation between input, output and power supply
- Prevents false measurement due to spurious potentials
- Processes live zero signals, provision for signal conversion
- Red LED signals indicates device in operating condition
- Electrical insulation between power supply versus all other circuits
- 3.0 kV, and between input and output -2.3 kV.

THETA PI-101

Programmable Dual output DC Isolator



Application

The purpose of the Sifam Tinsley PI-101 is to electrically isolate input, output and power supply. The isolator fulfills all requirements and regulation concerning electromagnetic compatibility EMC and safety(IEC61326-1 and IEC 61010-1:2010). The device has one input and provides one independent output in an extremely small space.

Product Features

Electric Isolation

- 1) One electrically isolated analog output prevent interference voltage and current. Solves grounding problem in meshed signal networks.
- 2) High electric isolation between input and output - 2.3 kV, and power supply versus all other circuits - 3.0 kV.


Function

Simple de isolator serves to electrically isolate programmable input de signal to programmable de output signal.


Technical Specifications

Measuring inputs :	
DC current standard ranges	1) 0...20mA 2) 0...10mA 3) 4...20mA 4) 0...24mA
Input resistance	< 15.5 Ω
DC voltage standard ranges	1) 0...12V 2) 0...10V 3) 0...5V 1 ... 5V
Measuring output1:	
DC current standard ranges	1) 2...10mA 2) 4...20mA 3) 0...10mA 4) 0...20mA
Burden voltage	15V
External Resistance	$R_{ext} \max. [\Omega] = 15V / I_{AN} [mA]$ $I_{AN} = \text{Output circuit full scale value}$
DC voltage standard ranges	1) 0...05V 2) 0...10V 3) 2...10V 4) 2 ... 10V
Burden	$R_{ext} \min. [k\Omega] = U_{AN} [V] / 5 \text{ mA}$ $U_{AN} = \text{Output circuit full scale value}$
Current limiter at $R_{ext} = 0$	< 42mA for voltage output
Voltage limiter at $R_{ext} = \infty$	< 20 V for current output
Residual ripple in Output	< 0.4 % p.p.
Response time	< 50 ms
Common mode voltage	100V
Pollution degree	2
Power supply :	
Rated operating voltage	60 ... 230... 300 V DC/AC OR 20 ... 24 ...40 VAC/20...30...60 VDC
Rated operating frequency	45 ... 50-60 ... 65 Hz
Power input	< 5 VA
Accuracy data (Acc to IEC 60688)	
Basic Accuracy	Limit error < ± 0.2 % including linearity and reproducibility errors
Reference conditions	
Ambient temperature	23°C + 2°C
Output burden	Current: 0.5 * $R_{ext} \max.$ Voltage: 2 * $R_{ext} \min.$
Nominal value of Aux	
Supply voltage:	230V 50Hz or 60 Hz AC/DC 30V 50Hz or 60 Hz AC/DC

Dimensions

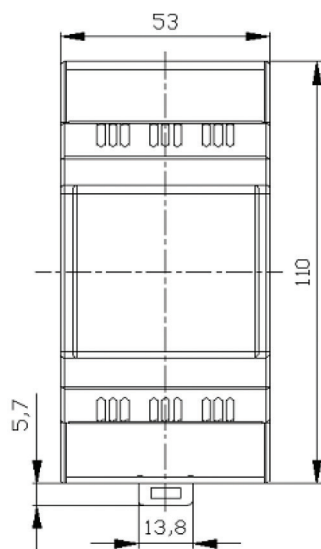


Note : All Dimensions are in mm

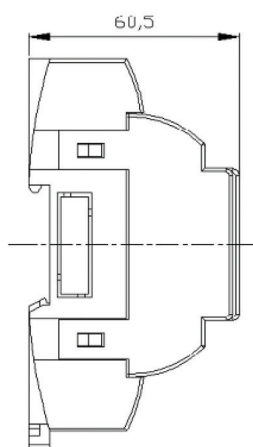

Influence factors	
Temperature	$\pm 0.01\%$ per $^{\circ}\text{C}$
Burden influence	$< \pm 0.1\%$ for current output $< \pm 0.1\%$ for voltage output
Switch-on drift	$< \pm 0.2\%$
Longtime drift	$< \pm 0.3\%$ / 12 months
Magnetic Field	$< \pm 0.2\%$ (400 A/T)
Environmental condition	
Climatic rating	Climate class 3 acc. to VDI /VDE 3540
Operating Temperature	$-10 \dots 23 \dots 55^{\circ}\text{C}$
Storage temperature	-40°C to 70°C
Annual mean relative humidity	75% standard Climatic rating.
Reference conditions	
Ambient temperature	$23^{\circ}\text{C} \pm 2^{\circ}\text{C}$
Output burden	Current: $0.5 \cdot R_{ext} \text{ max.}$ Voltage: $2 \cdot R_{ext} \text{ min.}$
Nominal value of Aux	
Supply voltage:	230V 50Hz or 60 Hz AC/DC 30V 50Hz or 60 Hz AC/DC
Influence factors	
Temperature	$\pm 0.01\%$ per $^{\circ}\text{C}$
Burden influence	$< \pm 0.1\%$ for current output $< \pm 0.1\%$ for voltage output
Switch-on drift	$< \pm 0.2\%$
Longtime drift	$< \pm 0.3\%$ / 12 month
Magnetic field	$< \pm 0.2\%$ (400 A/T)
Regulations	
Electromagnetic Compatibility	Acc. to IEC 61326 - 1
Protection	For Housing : IP40 Terminals : IP20
Electrical standards	Acc. to IEC 61010 -1 / EN 61 010 -1
Pollution degree	2
Over voltage category	III for power supply. II for measuring input and measuring output.
Test Voltage	Power supply versus : -All 3.7 kV, 50 Hz 1 min (Leakage current 5mA) Measuring inputs versus : -Measuring outputs 2.3 kV, 50 Hz 1min & O/P1 to O/P 2: 500 V ,50 Hz ,1 min -All circuits versus case: 3.7kV, 50 Hz ,1min
Installation Data	
Mounting position	Rail mounting
Weight	Approx. 0.25kg
Connection Terminal	
Connection Element	Conventional Screw type
Permissible cross section of the connection lead	4.0mm ² single wire or 2 x 2.5mm Fine wire.
Permissible Vibrations	2 g acc. to EN 60 068-2-6
Shocks	3 x 50 g 2 shocks each in 6 directions Acc. to EN 60 068-2-27

Electrical Connections

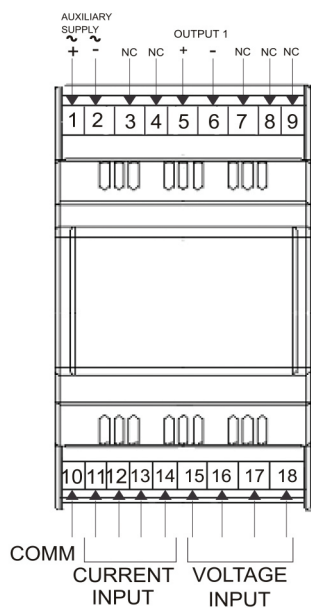

Connection	Terminal details	
Measuring Current input	+	-
A) 0....24mA	11	10
B) 4....20mA	12	10
C) 0....20mA	13	10
D) 0....10mA	14	10
Measuring Voltage input		
A) 0....0.5V	15	10
B) 0....0.5V	16	10
C) 0....12V	17	10
D) 0....10V	18	10
Measuring output 1	5	6
Auxiliary supply	1	2

Configuration:

Sifam Tinsley PI-101 inputs and output can be configured using slide switches. Table A and B contains the switch position information for the configuration of input and output respectively. When ever configuration is changed output need adjustment must be accomplished using "Z" (Zero) and "S" (Span) potentiometers provided on front panel.

FIGURE: FRONT PANEL OF Sifam Tinsley PI-101




TABLE A: INPUT RANGE SELECTION

Input	S1	S2	S3	S4
0...20mA	OFF	OFF	OFF	OFF
0...10mA	OFF	OFF	OFF	ON
0...24mA	OFF	OFF	ON	OFF
4...20mA	OFF	OFF	ON	ON
0...10V	OFF	ON	OFF	OFF
0...12V	OFF	ON	OFF	ON
0...5V	OFF	ON	ON	OFF
1...5V	OFF	ON	ON	ON

TABLE B: O/P1 & O/P2 RANGE SELECTION

Output	S1 & S2	S3	S4
0...10mA	OFF	OFF	OFF
0...20mA	OFF	OFF	ON
2...10mA	OFF	ON	OFF
4...20mA	OFF	ON	ON
0...5V	ON	OFF	OFF
0...10V	ON	OFF	ON
1...5V	ON	ON	OFF
2...10V	ON	ON	ON

Output characteristics

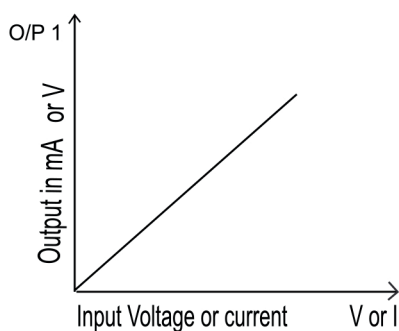

Variants:

Auxillary Supply
60-300 VAC/DC
20-40VAC/20-60VDC

Contact



Sifam Tinsley Instrumentation Ltd

1 Warner Drive
Springwood Industrial Estate
Braintree
Essex
CM7 2YW

Tel: 01376 335271
Email: sales@sifamtinsley.com

www.sifamtinsley.co.uk