




sifam tinsley
PRECISION INSTRUMENTATION

TRANSFORMER SERIES
OMEGA 3 PHASE CURRENT TRANSFORMERS
www.sifamtinsley.co.uk



DATASHEET

Issue 2.0

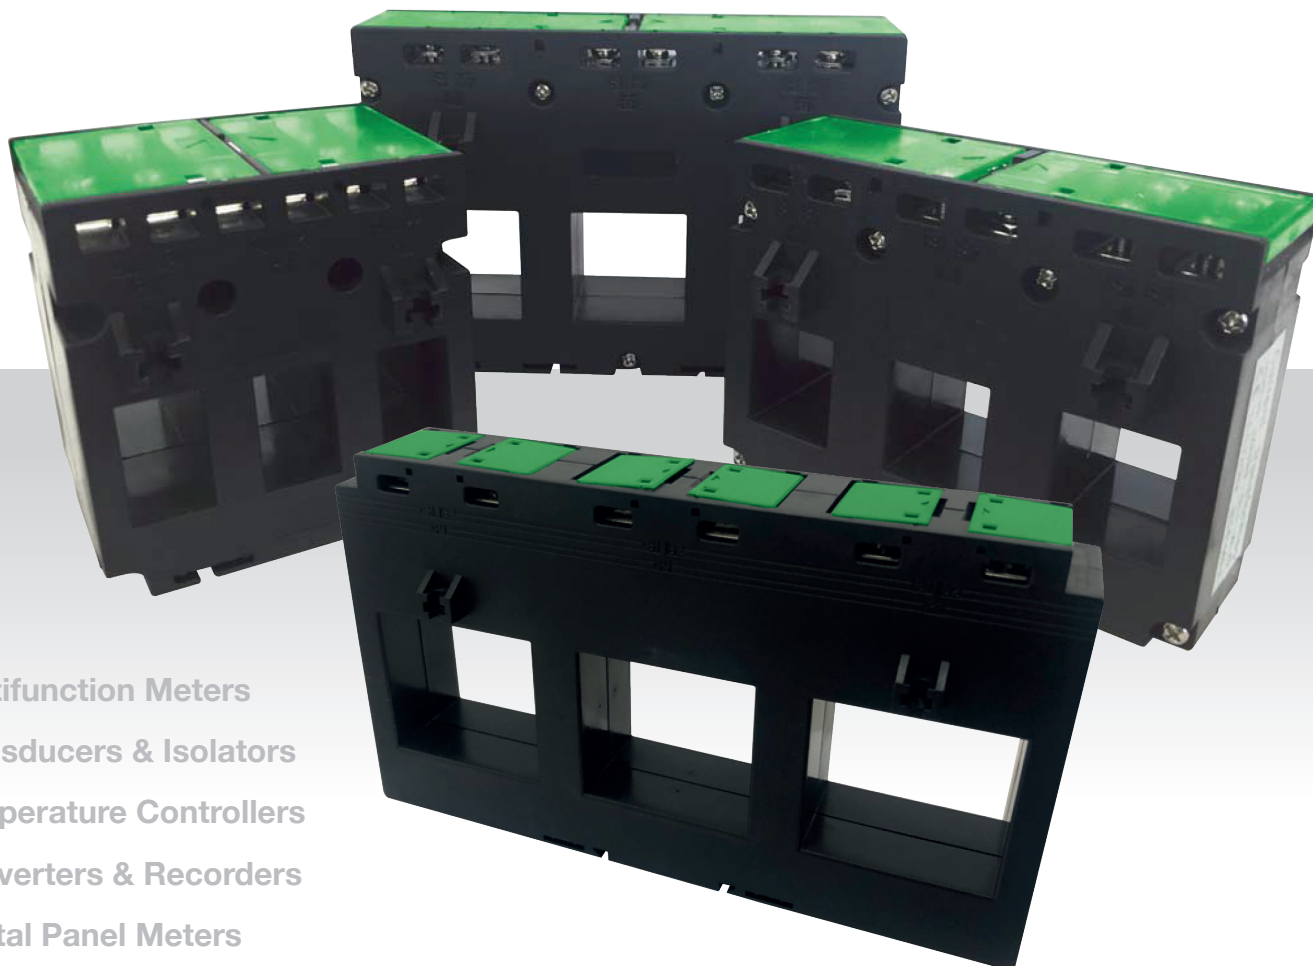

Multifunction Meters
Transducers & Isolators
Temperature Controllers
Converters & Recorders
Digital Panel Meters
Current Transformers
kWh Energy Meters
Analogue Panel Meters
Shunts
Digital Bargraphs
Digital Multimeters
Protection Relays
Synchroscope Series
Rotary Switches
Power Supplies
Test & Measurement

TRANSFORMER SERIES OMEGA 3 PHASE CURRENT TRANSFORMERS


SUBJECT TO CHANGE WITHOUT NOTICE

This datasheet superseded all previous versions – please keep for future reference

Product Features:

- High quality 3 Phase Current Transformers
- System voltage 720V 50-60Hz
- Primary currents 60 to 1600 Amps AC
- Test voltage 3kV for 1 minute
- Thermal short circuit current (I_{th}) $60 \times I_n$
- Dynamic short circuit current (I_{dyn}) $2.55 \times I_{th}$
- Flame retardant polycarbonate UL94V-0
- International standards IEC/EN 60044-1 / IEC 61869-1, IEC 61010-2
- DIN rail, bus bar or base mounting
- 3 sizes: 15 x 25mm, 21 x 25mm & 31 x 31mm, 54 x 50mm apertures
- Cable apertures from 15.5mm to 54mm
- Accuracy Class 1

LM1360 RJ12 Multifunction Meter

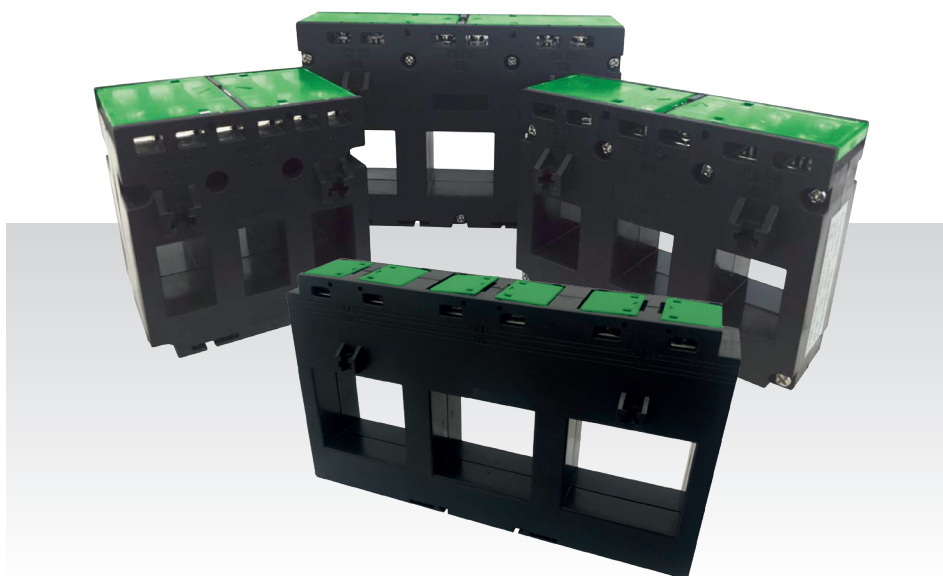

Three phase measuring current transformers suitable for primary ranges from 60A to 1600A with 5A secondary. Allowing installations directly next to the moulded case circuit breakers for greater speed of installation and optimisation of space. Applicable to MCCB such as Manufacturers: ABB, Hager, Dorman Smith, Schneider, Terasaki, Merlin Gerlin, Chint, Legrand plus many more.




Specification

- High quality 3 Phase Current Transformers
- System voltage 720V 50-60Hz
- Primary currents 60 to 1600 Amps AC
- Test voltage 3kV for 1 minute
- Thermal short circuit current (I_{th}) 60 x I_n
- Dynamic short circuit current (I_{dyn}) 2.55 x I_{th}
- Flame retardant polycarbonate UL94V-0
- International standards IEC/EN 60044-1 / IEC 61869-1, IEC 61010-2
- DIN rail, bus bar or base mounting
- 3 sizes: 15 x 25mm, 21 x 25mm & 31 x 31mm, 54 x 50mm apertures
- Cable apertures from 15.5mm to 54mm
- Accuracy Class 1


Part Number	CT Ratio	Weight kgs	VA Class 1	Dimensions
XN25-145011S 000000	60/5A	0.6	1	3 x (15 x 25mm) width 76mm
XN25-185031S 000000	100/5A	0.6	1.5	3 x (15 x 25mm) width 76mm
XN25-205031S 000000	125/5A	0.6	1.5	3 x (15 x 25mm) width 76mm
XN25-225031S 000000	150/5A	0.6	1.5	3 x (15 x 25mm) width 76mm
XN25-235031S 000000	160/5A	0.6	1.5	3 x (15 x 25mm) width 76mm
XN35-145031S 000000	60/5A	0.4	1.5	3 x (21 x 25 mm) width 105mm
XN35-185031S 000000	100/5A	0.4	1.5	3 x (21 x 25 mm) width 105mm
XN35-205031S 000000	125/5A	0.4	1.5	3 x (21 x 25 mm) width 105mm
XN35-225031S 000000	150/5A	0.4	1.5	3 x (21 x 25 mm) width 105mm
XN35-235031S 000000	160/5A	0.4	1.5	3 x (21 x 25 mm) width 105mm
XN35-245031S 000000	200/5A	0.4	1.5	3 x (21 x 25 mm) width 105mm
XN35-275031S 000000	250/5A	0.4	1.5	3 x (21 x 25 mm) width 105mm
XN45-275031S 000000	250/5A	0.65	1.5	3 x (31 x 31 mm) width 141mm
XN45-285051S 000000	300/5A	0.65	2.5	3 x (31 x 31 mm) width 141mm
XN45-315051S 000000	400/5A	0.65	2.5	3 x (31 x 31 mm) width 141mm
XN45-325051S 000000	500/5A	0.65	2.5	3 x (31 x 31 mm) width 141mm
XN45-335051S 000000	600/5A	0.65	2.5	3 x (31 x 31 mm) width 141mm
XN45-345051S 000000	630/5A	0.65	2.5	3 x (31 x 31 mm) width 141mm
XN70-335111S000000	600/5A	1	10	3 x (54 x 50mm) width 214mm
XN70-375111S000000	800/5A	1	10	3 x (54 x 50mm) width 214mm
XN70-395111S000000	1000/5A	1	10	3 x (54 x 50mm) width 214mm
XN70-405111S000000	1200/5A	1	10	3 x (54 x 50mm) width 214mm
XN70-435111S000000	1600/5A	1	10	3 x (54 x 50mm) width 214mm

Dimensions


XN25

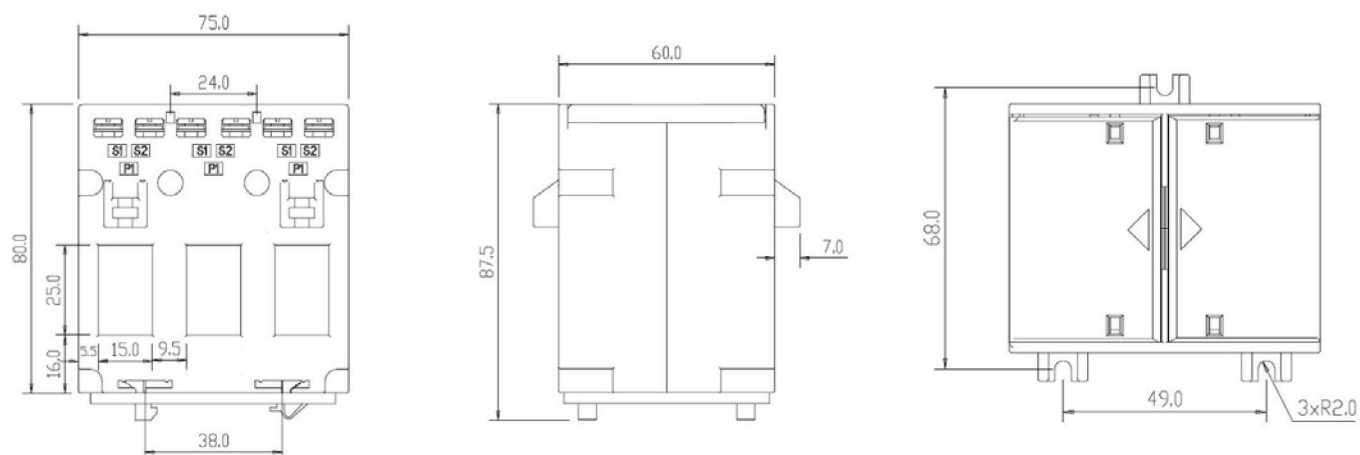


XN35

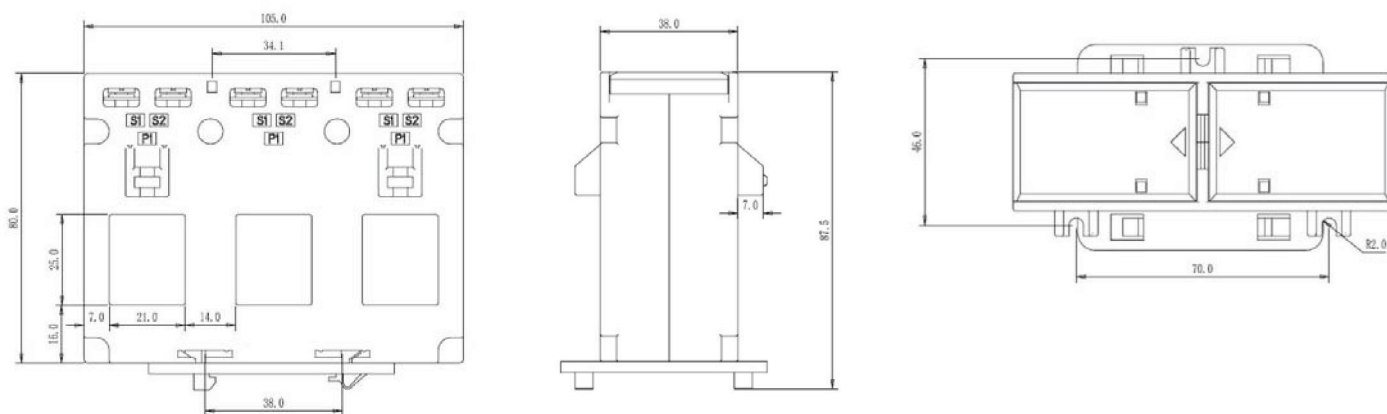

XN45

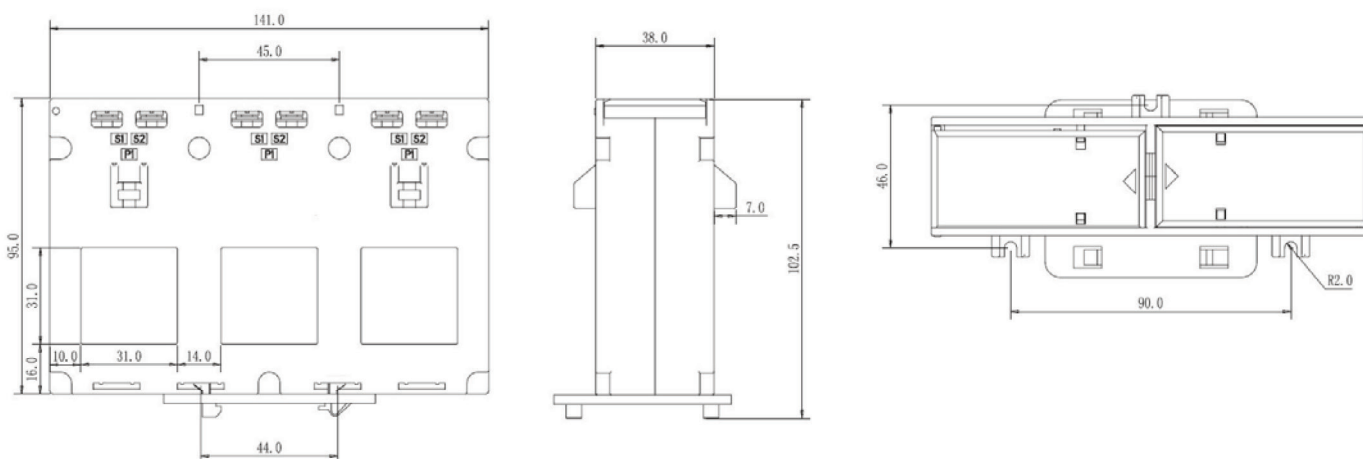

XN70

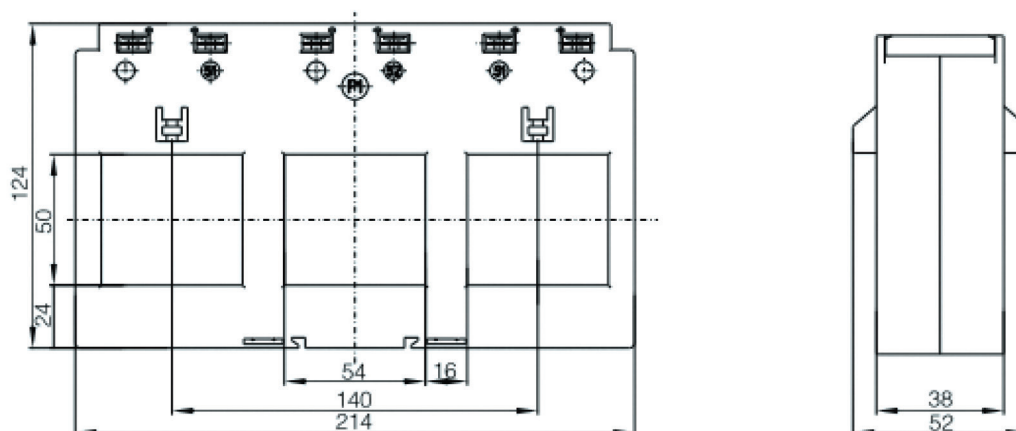

Contact



Sifam Tinsley Instrumentation Ltd

1 Warner Drive
Springwood Industrial Estate
Braintree
Essex
CM7 2YW

Tel: 01376 335271
Email: sales@sifamtinsley.com

www.sifamtinsley.co.uk