

RE55 CONTROLLER

FEATURES:

on/off
algorithm

Password
protection

PID
algorithm

Auto-
tuning



- Temperature input (thermocouple or resistance thermometer).
- Control output: relay or transistor.
- Alarm output: relay (option).
- Control: on/off of PID with auto-tuning (option).
- Setting of the set point value by means of the knob.
- Programming push-buttons (option).

INPUT:



OUTPUTS:




SSR
output



GALVANIC ISOLATION:



EXAMPLE OF APPLICATION

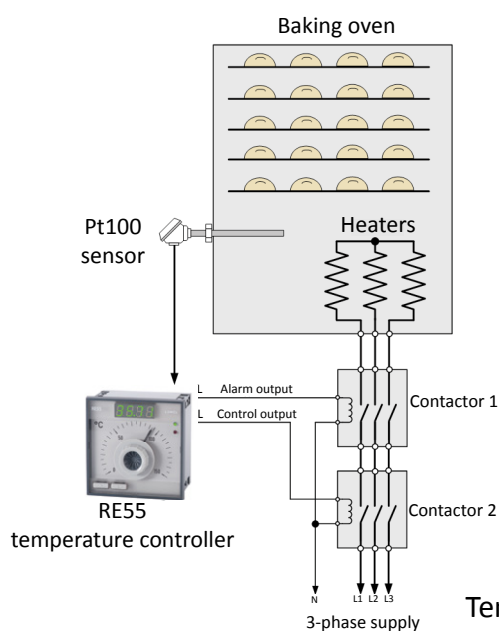

Temperature control in a baking oven.

INPUT

Input type	Range	Error	Basic error
Pt100	-50 .. 100°C	0.8°C	Compensation of thermocouple cold junction temperature changes: $\leq 2^{\circ}\text{C}$
Pt100	0 .. 100°C	0.5°C	
Pt100	0 .. 150°C	0.8°C	
Pt100	0 .. 250°C	1.3°C	Ambient temperature change: $\leq 100\%$ of basic error/ 10 K
Pt100	0 .. 400°C	2.0°C	
Pt100	0 .. 600°C	3.0°C	
Fe-CuNi (J)	0 .. 250°C	2.0°C	Resistance thermometer line resistance change: $\leq 50\%$ of basic error
Fe-CuNi (J)	0 .. 400°C	2.0°C	
Fe-CuNi (J)	0 .. 600°C	3.0°C	
Fe-CuNi (J)	0 .. 900°C	4.0°C	
NiCr-NiAl (K)	0 .. 600°C	3.0°C	
NiCr-NiAl (K)	0 .. 900°C	4.0°C	
NiCr-NiAl (K)	0 .. 1300°C	6.0°C	
PtRh10-Pt (S)	0 .. 1600°C	8.0°C	

OUTPUT

Output type	Properties	Remarks
Relay (control)	- 1 output	switch-over contact, 2 A/ 230 V
Transistor voltage (control)	- 1 output 5 V	resistance limiting the current 10 Ω , without isolation from input side
Relay (alarm)	- 1 output	NO contact, 1 A/ 230 V

RE55 CONTROLLER

EXTERNAL FEATURES

Readout field	LED	10 mm, 4 digits
Overall dimensions	96 × 96 × 65 mm	
Weight	< 0.3 kg	
Protection grade	from frontal side: IP40	from terminal side: IP20


RATED OPERATING CONDITIONS

Supply voltage	85 .. 253 V d.c./a.c.	frequency: 40 .. 440 Hz
Temperature	ambient: 0...23...50°C	storage: -20...70°C
Humidity	< 85% without condensation	
Operating position	any	
External magnetic field	< 400 A/m	
Power input	< 4 VA	

SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Pollution level	2	
Installation category	III	
Maximum phase-to-earth operating voltage	for supply circuit, output: 300 V	for input circuits: 50 V
Altitude above sea level	up to 2000 m	

CONNECTION DIAGRAMS

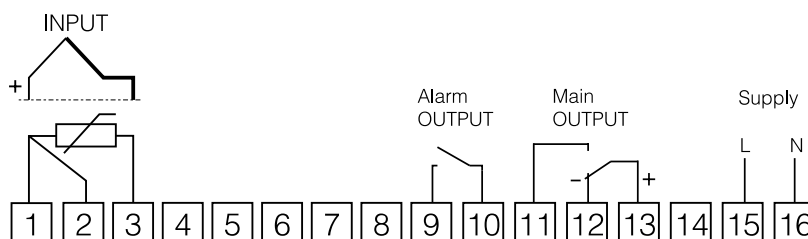

ORDERING

RE55 - XX X X XX X	
Input:	
Pt100/1.3850	-50..100°C 01
	0..100°C 02
	0..150°C 03
	0..250°C 04
	0..400°C 05
	0..600°C 06
Fe-CuNi (J)	0..250°C 07
	0..400°C 08
	0..600°C 09
	0..900°C 10
NiCr-NiAl (K)	0..600°C 11
	0..900°C 12
	0..1300°C 13
PtRh10-Pt (S)	0..1600°C 14
as per order*	99
Option:	
on/off controller	1
PID controller	2
configurable controller with push-buttons	3
Control output:	
relay	1
voltage 0/5 V	2
Version:	
standard	00
custom-made*	XX
Additional quality requirements:	
without additional quality requirements	8
with an extra inspection quality certificate	7
acc. to customer's request**	X

Order example:

The code: **RE55 - 02 1 1 00 8** means:

- RE55** - controller of RE55 type
- 02** - input Pt100: 0..100°C
- 1** - on/off control
- 1** - control output: relay
- 00** - standard version
- 8** - without additional quality requirements.



sifam tinsley
PRECISION INSTRUMENTATION

Sifam Tinsley Instrumentation Ltd

1 Warner Drive, Springwood Industrial Estate,
Braintree, Essex CM7 2YW

Contact No. : +44 (0) 1376 335271

Email: sales@sifamtinsley.com

www.sifamtinsley.co.uk

* after agreeing with the manufacturer

** the ordering code will be established by the manufacturer