sifam tinsley
PRECISION INSTRUMENTATION

N25
www.sifamtinsley.co.uk

DATASHEET Issue 1.0

Multifunction Meters

Transducers & Isolators

Temperature Controllers

Converters & Recorders

Digital Panel Meters

Current Transformers

Analogue Panel Meters

Shunts

Digital Multimeters

Clamp Meters

Insulation Testers

N25
DIGITAL PANEL METER

Features

- Destined for measurement of d.c. voltage or d.c. current, temperature through Pt100 resistance thermometers, J, K thermocouples, a.c. voltage and a.c. current.
- 5 LED digit displays with 14 mm digit high.
- Parameters programmable by PD14 programmer.

SUBJECT TO CHANGE WITHOUT NOTICE
This manual superseded all previous versions – please keep for future reference

N25

Features

- Destined for measurement of d.c. voltage or d.c. current, temperature through Pt100 resistance thermometers, J, K thermocouples, a.c. voltage and a.c. current.
- 5 LED digit displays with 14 mm digit high.
- Parameters programmable by PD14 programmer:
  - precision of displayed results (decimal point)
  - measurement averaging time
  - recounting of indicati ons (individual characteristic)
  - automatic or manual compensation: cold junction temperature for measurement with thermocouples or wire resistance for measurement with Pt100 (N25T).

Features

Inputs

Outputs

Galvanic Isolation

Example of Application

Measurement and display:

- temperature
- analog signals
- d.c. current and voltage
- rms current and voltage.

Inputs

Type	Measuring ranges		Parameters	Overloads	Errors
N25S	-11 mV...-10 mV...60 mV...66 mV		Input resistance >1 MΩ	Short durati on overload (1s): - voltage input: 10 Un - current input: 5 In Sustained overload: 110% Un, 110% In	Basic error: ± (0.2% of range + 1 digit) Additional error from ambient temperature changes: ± (50% of basic error/10K)
	-66 mV...-60 mV...60 mV...66 mV				
	-0.5 V...0 V...10 V...11 V				
	-11 V...-10 V...10 V...11 V				
	-1 mA...0 mA...20 mA...22 mA		Input resistance 10 Ω ±1%		
	3.6 mA...4 mA...20 mA...22 mA		Input resistance 10 Ω ±1%		
N25T	Pt100	-50˚C...150˚C	Current fl owing through the sensor: < 300 μA. Resistance of wires connecting RTD with the meter: - max 5 Ω (per wire) for automatic compensation - max 10 Ω (per wire) for manual compensation	Short duration overload (1s) Input of sensors: 30 V	Basic error: ± (0.2% of range + 1 digit) Additional errors: • compensati on of cold junction temperature changes: ± 0.2% of range, • from ambient temperature changes: ± (50% of basic error/10K).
		-50˚C...400˚C			
	Thermocouple J	-50˚C...1200˚C			
	Thermocouple K	-50˚C...1370˚C			
N25Z	1...100...120 V a.c.		Input resistance > 2 MΩ	Short term overload (1s): voltage input: 2 Un (< 1000V), current input: 10 In Sustained overload: 150% Un (for 400 V input), 120% (for remaining inputs), 120% In	Basic error: • voltage and current: ± (0.5% of range + 1 digit) in frequency range 20...500 Hz • frequency: ± (0.02% of range + 1 digit) Additional error from ambient temperature changes: ± (50% of basic error/10K)
	2.5...250...300 V a.c				
	4...400..600 V a.c.				
	20...500 Hz (in voltage range: 24...480 V)				
	0.01...1...1.2 A a.c.		Input resistance 10 mΩ ±10%		
	0.05...5...6 A a.c.		Input resistance 2 mΩ ±10%		
N25H	0...100...110 V d.c.		Input resistance > 2 MΩ	Short term overload (1s): voltage input: 2 Un (< 1000V), current input: 10 In Sustained overload: 150% Un (for ± 400 V input), 120% (for remaining inputs), 120% In	Basic error: ± (0.2% of range + 1 digit) Additi onal error from ambient temperature changes: ± (50% of basic error/10K)
	0...250...275 V d.c.				
	-120...-100...100...120 V d.c.				
	-300...-250...250...300 V d.c.				
	-600...-400...400...600 V d.c.				
	-1.2...-1...1...1.2 A d.c.		Input resistance 10 mΩ ±10%		
	-6...-5...5...6 A d.c.		Input resistance 2 mΩ ±10%		

Outputs

For N25S and N25T	Output for supply external transducers	24 V ± 5%, 30 mA

External features

Weight	< 0.25 kg	
Overall dimensions	96 x 48 x 64 mm (with terminals)	
Protection grade (acc. to EN 60529)	ensured by the housing: IP65	from the terminal side: IP 20
Display	5-digit LED display, 20 mm high, red colour	indication range: -1999...9999

Rated operating conditions

Supply voltage	230 V ± 10% a.c. (45...65 Hz); 110 V ± 10% a.c. (45...65 Hz) 24 V ± 10% a.c. (45...65 Hz); 85...253 V a.c. (40...400 Hz) or d.c.; 20...40 V a.c. (40...400 Hz) or d.c.	input power consumption: 6 VA
Temperature	ambient: -10...23...55˚C	storage: -25..85 ˚C
Relative humidity	≤ 95%	condensation inadmissible
Operating position	any	
Preheating time	30 min	
Averaging time	≥ 0.5 s	1 second default set

Safety and compatibility requirements

Electromagnetic compatibility	noise immunity noise emissions	acc. to EN 61000-6-2 acc. to EN 61000-6-4
Isolation between circuits	basic	
Pollution grade	2	
Installation category	III (for the 400 V option - category II)	
Maximal phase-to-earth operating voltage	for supply circuits: 300 V, for measuring circuits: 600 V - cat. II for other circuits: 50 V	acc. to EN 61010-1
Altitude above sea level	< 2000 m	

Connection Diagrams



Fig. 1. Electrical connections of the N25S meter

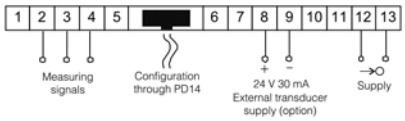

Fig. 2. Electrical connections of the N25T meter



Fig. 3. Connections of N25T measuring inputs

Fig. 4. Electrical connections of N25Z and N25H meters for the measurement of voltage (and frequency only in N25Z)



Fig. 5. Electrical connections of N25Z i N25H meters for the current measurement

Table 1. Ordering codes:

N25 -	X	X	X	XX	XX	X	X
Input kind:							
standard: voltage, current	S						
temperature: thermocouples, resistance thermometers	T						
a.c. signals	Z						
d.c. signals: high voltage and high current	H						
Input:							
see table 2		X					
Supply:							
230 V a.c.			1				
110 V a.c.			2				
24 V a.c.			3				
85...253 V a.c./d.c. with supply output 24 V/30 mA*			4				
20...40 V a.c./d.c. with supply output 24 V/30 mA*			5				
Unit:							
see table 3				XX			
Version:							
standard					00		
non-standard settings					NS		
custom-made**					XX		
Language:							
Polish						P	
English						E	
other**						X	
Acceptance tests:							
without extra requirements							0
with an extra quality inspection certificate							1
acc. to customer's request**							X

* -The output is only in N25S and N25T meters
** - After agreeing with the manufacturer

Table 2. Input Signals

Nr	N25S	N25T	N25Z	N25H
1	0...20 mA	Pt100: -50...150°C	100 V a.c.	±100 V d.c.
2	4...20 mA	Pt100: -50...400°C	250 V a.c.	±250 V d.c.
3	0...60 mV	Thermocouple J	400 V a.c.	±400 V d.c.
4	0...10 V	Thermocouple K	1 A a.c.	±1 A d.c.
5	± 60 mV		5 A a.c.	±5 A d.c.
6	± 10 V		20...500 Hz	0...100 V d.c.
7				0...250 V d.c.

Table 3. Codes of Printed Units

Code	Unit	Code	Unit	Code	Unit
00	without unit	06	mA	12	bar
01	°C	07	kA	13	kPa
02	%	08	kV	14	MPa
03	A	09	Hz		
04	V	10	turns	XX	on order
05	mV	11	rpm		

Table 4. Example of Non-standard Settings

Parameter	Range/Value
Decimal point	000,0 for I, U
Averaging time	1 s
Upper measurement overflow	9999
Lower measurement overflow	-1999
Individual characteristic	enabled
Parameter a of the individual characteristic	5
Parameter b of the individual characteristic	0

Order example 1 :
The code **N25Z-2 1 04 00 E 0** means
N25Z - digital meter for a.c. signals
2 - input: 250 V a.c.
1 - supply: 230 V a.c.
04 - unit: V
00 - standard version
E - English language
0 - without extra requirements

Order example 2 :
The code **N25S-1 4 02 NS E 1** means:
N24S - digital meter for d.c. signals
1 - input: 0...20mA
4 - supply: 85...253 V a.c. wiht supply output: 24V/30mA
02 - unit: %
NS - non-standard settings, display range: 0...100.0
E - English language
1 - with an extra quality inspection certificate

Contact

Sifam Tinsley Instrumentation Ltd

1 Warner Drive
Springwood Industrial Estate
Braintree, Essex
CM7 2YW

Tel: 01376 335271
E-mail: sales@sifamtinsley.com

www.sifamtinsley.co.uk