



## Safety and compatibility requirements

Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Isolation between circuits	basic	acc. to EN 61010-1
Pollution level	2	
Installation category	III	
Maximal phase-to-earth operating voltage	50 V	
Altitude a.s.l.	< 2000 m	

## Connection diagram

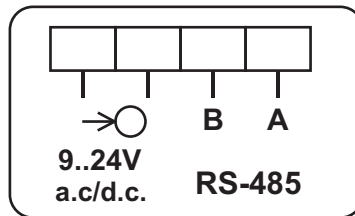


Fig. 2. Connection diagram of P19.

## Ordering

	P19 -	XX	X	X
<b>Version:</b>				
standard		00		
custom-made*		XX		
<b>Language:</b>				
Polish			P	
English			E	
other*			X	
<b>Acceptance tests:</b>				
without extra quality requirements				0
with an extra quality inspection certificate				1
according to customer's request*				X

\* only after agreeing with the manufacturer

### Order example:

The code: **P19 - 00E0** means:

P19 – temperature and humidity transducer of P19 type

00 – standard version

E – English version

0 – without extra quality requirements.

## See Also




KD7 recorder.



Interface converter  
USB/RS-485 - PD10.



Tricolour digital  
display for outdoor  
application  
-DL21.



For more information  
about SIFAM's  
products please visit  
our website  
[www.sifamtinsley.com/uk](http://www.sifamtinsley.com/uk)