

DIGITAL CLAMP METER MANUAL RANGE AC CLAMP METER **VA310C**



The Manual Range AC 1000 Amps Clamp Meter is a handheld 3 1/2 digital clamp meter for measuring DC and AC voltage, AC current, Resistance, Diode and Continuity Test etc with battery operated.

FEATURES

- Continuity Buzzer
- Data Hold
- Back Light



SPECIFICATIONS

See the tables below for product specifications.

Product Specifications			
AC Voltage	1000V	Display Counts	1999
DC Voltage	1000V	AC Current	1000A
AC Current	1000A	Display Counts	6000
Resistance	2kΩ	Jaw Opening	40mm/ 1.57"
Temperature	-40°C~750°C		

* Subject to change without notification.

CONTENTS



L225 x W82 x D28mm
L8.8"x W3.2"x D1.1"
268g/ 0.59lb



Battery 1.5V
AAA x 3




Accessories

Test Leads
K-type Thermocouple
Carry Bag
Battery



User
Manual

MAIN APPLICATIONS

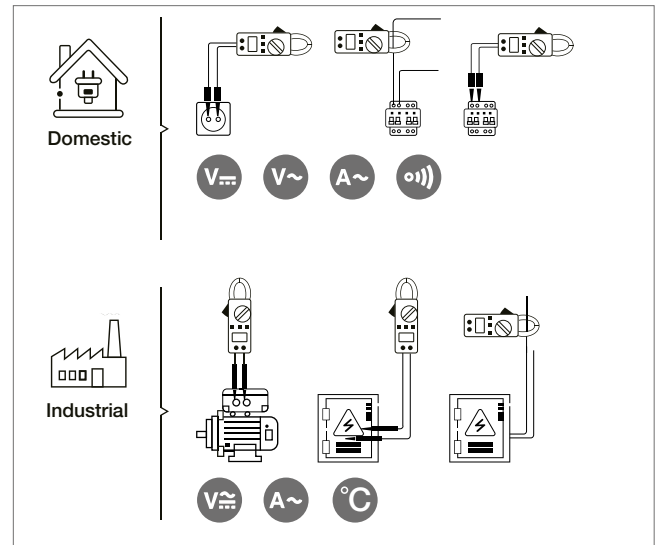

PACKAGING INFORMATION



Color Box
L 139 X W 52 X H 255mm



Carton Box
54 X 31 X 44.5cm



X 30Pcs