

DIGITAL CLAMP METER AUTO RANGE AC & DC CLAMP METER **VA318**



TRMS

Bar Graph

The meter is an auto range 1000 AC&DC Amps clamp meter with bar graph and 3999 counts. For measuring DC and AC voltage, DC and AC current, Resistance, Frequency, Frequency for the clamp, Diode, and Continuity Test with battery operated.

FEATURES

- True RMS Measurement
- Relative Measurement
- Continuity Buzzer
- Bar Graph
- Data Hold



SPECIFICATIONS

See the tables below for product specifications.

Product Specifications			
AC Voltage	700V	Resistance	40MΩ
DC Voltage	1000A	Frequency	4MHz
AC Current	1000A	Display Counts	4000
DC Current	1000A	Jaw Opening	42mm/1.65"

* Subject to change without notification.

CONTENTS



L225 x W82 x D28mm
L8.8" x W3.2" x D1.1"
260g/ 0.57lb



Battery 1.5V
AAA x 3



Accessories

Test Leads
Carry Bag
Battery




User
Manual


MAIN APPLICATIONS



Domestic

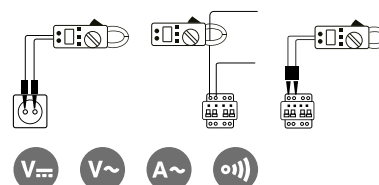

Industrial



PACKAGING INFORMATION



Color Box
L 139 X W 52 X H 255mm



Carton Box
54 X 31 X 44.5cm



X 30Pcs